


Basic Specifications

Model	RM-5800J		
Capacity	3/6 kg		6/15 kg 15/30 kg
CPU	RK3288 Quad-core ARM CORETEX-A17 1.8GHz		Intel J1900 2.0GHz Intel J3455 2.30GHz
Memory	2G DDR3L Co-layout	4G DDR3L Co-layout	4G DDR3L SO-DIMM(Up to 8G)
Storage	16G Co-layout eMMC NAND flash	32G Co-layout eMMC NAND flash	32G SSD(Optional 128G)
OP Display	10.1 Inches TFT-LCD 1024 x 600 pixels with Touch panel		
CU Display	7 Inches TFT-LCD 1024 x 600 pixels		
WIFI	WIFI 2.4G/5G 802.11a/b/g/n		Optional
Bluetooth	Bluetooth 4.0LE		Optional
Printer	High reliability thermal head printer Resolution: 203dpi Max Printing Width: 80mm Max Paper Width: 80mm(receipt)/80mm(label) Printing speed: Maximum 110 mm / sec Life span: 100 million pulses, 100km or more		
I/O	1 xRJ45, 1 xSerial port, 1 xRJ9 Cash drawer, 2 xUSB		
Power Source	AC 100V~264V, 50/60Hz		
OS	Android 7.1	Linux Ubuntu 20.04	Linux Ubuntu 20.04 or WIN10

External Dimensions(mm)

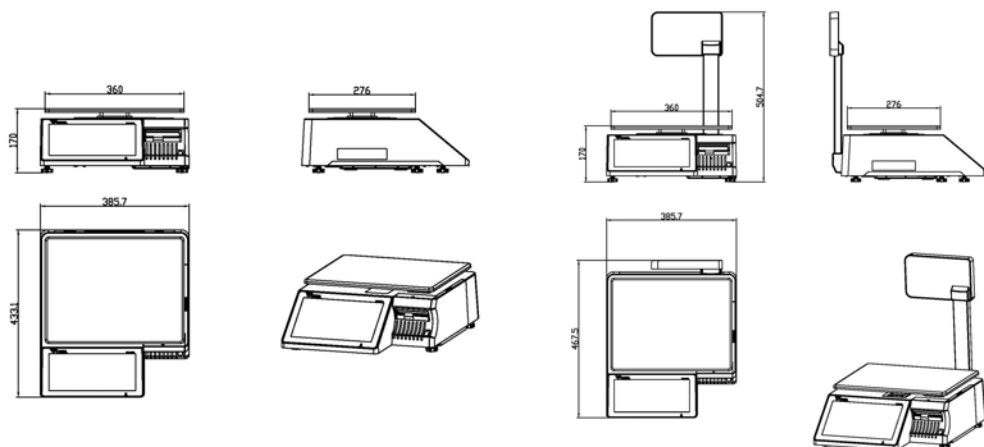

*Specifications are subject to change without prior notice.

SHANGHAI TERAOKA ELECTRONIC CO., LTD.

Tinglin Industry Developmental Zone,
Jinshan District, Shanghai 201505
TEL: +86-21-57234888
FAX: +86-21-57233049
<http://www.digisystem.com>



RM-5800J

Powerful partner in your retail business



Searching for
a New Balance